





## BEARING Driveshaft do Brasil

25 mm x 42 mm x 9 mm HR32008-XJ, 32008, 32008J2/Q Tapered Roller Bearing 40x68x19mm

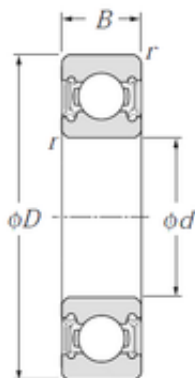

Bearing No. 6905LLU

6905LLU Bearing 2D drawings and 3D CAD models

Size	25x42x9 mm
Bore Diameter	25 mm
Outer Diameter	42 mm
Width	9 mm
d	25 mm
D	42 mm
B	9 mm
C	9 mm
r min.	0,3 mm
da min.	27 mm
da max	29 mm
Da max.	40 mm
ra max.	0,3 mm
Weight	0,042 Kg
Basic dynamic load rating (C)	7,05 kN
Basic static load rating (C0)	4,55 kN
Reference speed	9 800 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0



## BEARING Driveshaft do Brasil

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	25MM Bore; 42MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; C
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.093
Outside Diameter	1.654 Inch   42 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	0.354 Inch   9 Millimeter
Bore	0.984 Inch   25 Millimeter
bore diameter:	25 mm
precision rating:	ISO Class 0



## BEARING Driveshaft do Brasil

outside diameter:	42 mm
finish/coating:	Uncoated
overall width:	9 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	9 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	9800 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	9800 RPM
dynamic load capacity:	7050 N
series:	69
static load capacity:	4550 N
manufacturer product page:	<a href="#">Click here</a>